



Department of Community and Economic Development Program Overview

Community Development Block Grant (CDBG): The County of Summit is an Entitlement Community through the Department of Housing and Urban Development. Funds must provide a benefit to a low-to-moderate income individual or in a low-to-moderate income census tract determined by HUD and must meet one of HUD's national objectives. Funds may be used to assist income qualified individuals with minor home repairs such as a new roof and ADA accommodations.

Home Investment Partnership Program (HOME): Funds are received from HUD and must result in affordable housing for low-to-moderate income individuals. Funds may only be used in the County's service area. Funds may be used for acquisition, rehab, resale or owner occupied rehab. Funds may be used in conjunction with other housing related programs.

Lead Based Paint Hazard Reduction Program: The County works in partnership with the Summit County Health District to provide assistance to income qualified residents that have lead based paint hazards in their home. Applicants must have children under the age of 6 residing in the home or visit more than 62 hours a year. A lead risk assessment is conducted on each unit to verify where the lead hazard is located.

Household Sewage Treatment System (HSTS) Program: Funds are received from the Ohio EPA to replace failing septic systems for income qualified residents. Applicants must have a citation from the Summit County Health District to qualify for the program.

Home Weatherization Program: Funds are received from the Department of Energy to assist low income individuals reduce energy usage. Assistance could include new furnace, hot water tank, insulation, light bulbs, refrigerators and freezers.

Revolving Loan Fund Program: CDBG funds are used to fund the program. Funds are loaned to businesses to create or retain jobs for low-to-moderate income individuals. Businesses must be located in the County's service area. Loans may be used for working capital or rehabilitation of a building. Funds may not be used to purchase equipment.



Summit County Public Health

1867 West Market Street ♦ Akron, Ohio 44313-6901

Phone: (330) 926-5600 ♦ Toll-free: 1 (877) 687-0002 ♦ Fax: (330) 923-6436
www.scphoh.org

Dear Norton Resident:

The installation of sanitary sewer in the Nash Heights neighborhood of Norton is in progress. Please see below for frequently asked questions regarding this project:

How long do I have to tie into the sewer once it is installed?

Originally, a tiered tie-in time line of 60 days, 90 days, and 6 months had been developed to tie-in to the new sewer. However, to work with the neighborhood better, once the newly constructed sewer has been completed, tested and certified to be put to use, all owners will have 6 months to complete the tie-in and abandon the septic system. Please consult with the City of Norton on the projected completion date.

What drains have to be connected to the sanitary sewer system?

All drains in the home will have to be evaluated. In general, all waste water drains must be connected to the sewer system. This includes: toilets, laundry tubs, sinks, washing machines, dishwashers, water softener discharge, bath tubs, showers, garage floor drains etc. Clear water drains, such as down spouts, footer drains, and yard drains, are prohibited from connection to the sanitary sewer. In some older homes, these drains may not be separated, but will be required to be separated prior to connecting to the sanitary sewer. The most common problems are laundry drains that discharge to basement floor drains which may be connected to the footer drain system.

How is the septic system “abandoned”?

When no longer in use, all septic systems must be properly abandoned. Abandonment generally entails pumping all the septic components dry that are holding water/sewage and crushing the components so that they do not collect run-off water or become potential safety hazards. Once crushed, any “pits” created in the yard are generally filled with topsoil.

Who can abandon a septic system and is there a permit involved?

The final pumping of the septic system must be completed by a sewage hauler registered with Summit County Public Health (SCPH). A list of registered pumpers may be obtained on our website. Any contractor can complete the actual abandonment. Once the work is completed, a Sewage Treatment System Abandonment Report must be submitted to SCPH with a \$90.00 fee along with a copy of the final pumping receipt. The Abandonment Report forms will be available for pick-up at city hall. Once SCPH receives the Abandonment Report, a SCPH inspector will inspect the property to verify the abandonment.

For any questions regarding the abandonment of a septic system, please contact SCPH at 330-926-5600.



Rules and Regulations
Sanitary Sewer Lateral Installation
Barberton, Ohio

Applications for new sanitary sewer laterals shall be submitted to the Barberton Building Department along with the City of Barberton System Development Charge prior to scheduling the installation of any piping. There is also a \$30 sanitary sewer lateral permit fee to be submitted at the time the application is filed. The permit fee covers the cost of the sanitary lateral inspection.

The permit application shall be filed 15 days prior to the lateral installation to allow for the required stormwater cross connection inspections that are necessary before the new lateral is connected to the sanitary system. The stormwater inspection may include the use of dye testing, internal sewer televising, smoke testing, or any alternate method to determine the discharge point for the existing downspouts, sump pumps, footer drains, or any other suspect point of entry of stormwater on the property. This inspection and approval is required before excavation for the lateral begins. If evidence of a stormwater cross connection is found during the initial inspection, the stormwater connection must be removed by the Homeowner before excavation for the new sanitary lateral is permitted to commence.

Once the residence has been inspected and is approved, the Homeowner is responsible to contact the City of Barberton Building Department a minimum of 48 hours in advance of the excavation for the new lateral. Lateral inspections will be performed Monday through Friday between 9am and 3 pm. If an inspection is requested outside of these times it will be subject to the availability of inspection staff and there will be an overtime charge applied based on the excess time and material costs accrued by the City.


The following specifications shall apply to the installation of the new lateral:

1. No backfill shall be placed prior to the inspection by the City of Barberton
2. The pipe bedding shall be a minimum of 6 inches of #57 limestone
3. The pipe shall be 6 inch SDR 35 PVC, with gasketed joints
4. Grade shall be a minimum of 1% away from the residence
5. The pipe shall be laid straight and true to the main
6. There shall be a maximum of 180 degrees of bends in the pipe between the residence and the main
7. There shall be a clean out placed at each 90 ft. interval - measured from the house
8. There shall be a clean out directed toward the sewer main and placed at the street right-of-way line


The City of Barberton sanitary sewer lateral application and permit does not include the permitting, inspection, or required approval for the abandonment of septic tank systems.

The fees required prior to issuing a Sanitary Lateral Connection permit are as follows:


1. City of Barberton Tap-in fee \$1,600.00 (\$800.00 if installed within 6 months)
2. City of Barberton Lateral Inspection fee \$ 30.00
3. Copy of Summit County Health Dept. application for septic system abandonment \$90.00

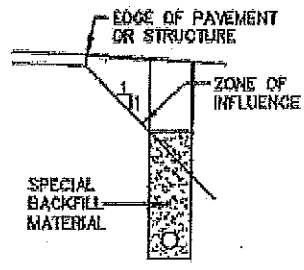

PARALLEL ZONE OF INFLUENCE

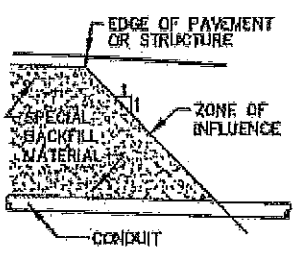

TRANSVERSE ZONE OF INFLUENCE

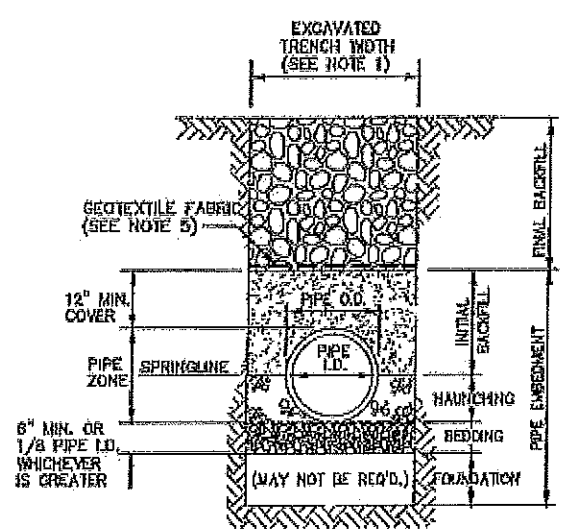

PIPE EMBEDMENT

NOTES:

1. MAXIMUM EXCAVATED TRENCH WIDTH: THE MAXIMUM EXCAVATED TRENCH WIDTH FROM THE BOTTOM OF THE TRENCH TO 12" OVER THE TOP OF THE PIPE (WITHIN PIPE EMBEDMENT) SHALL BE O.D. + 24" FOR ALL PIPES UP TO AND INCLUDING 24" I.D. + 30" FOR PIPE FROM 24" I.D. TO 54" I.D. AND O.D. + 48" FOR PIPES SIZES 60" I.D. AND OVER.
2. FOUNDATION: WHERE AN UNSTABLE TRENCH BOTTOM CONDITION IS ENCOUNTERED, THE CONTRACTOR SHALL EXCAVATE TO A DEPTH REQUIRED BY THE ENGINEER AND REPLACE WITH MATERIAL AS DIRECTED BY THE ENGINEER.
3. PIPE EMBEDMENT:
THE BEDDING AND HAUNCHING SHALL BE AASHTO NO. 57 OR NO. 67 GRANULAR PIPE EMBEDMENT. IN ALL AREAS UNDER PAVEMENT, STRUCTURES OR WITHIN THE ZONE OF INFLUENCE, THE INITIAL BACKFILL SHALL BE AASHTO NO. 57 OR NO. 67 STONE GRANULAR PIPE EMBEDMENT. BY ALL AREAS OUTSIDE OF PAVEMENT, STRUCTURES OR THE ZONE OF INFLUENCE, THE INITIAL BACKFILL SHALL BE SUITABLE ON-SITE MATERIAL APPROVED BY THE ENGINEER FOR ONLY REINFORCED CONCRETE PIPE AND DUCTILE IRON PIPE. THE INITIAL BACKFILL FOR ALL OTHER PIPES SHALL BE AASHTO NO. 57 OR NO. 67 GRANULAR PIPE EMBEDMENT.
4. FINAL BACKFILL: BY ALL AREAS UNDER PAVEMENT, STRUCTURES OR WITHIN THE ZONE OF INFLUENCE THE FINAL BACKFILL SHALL BE SPECIAL BACKFILL MATERIAL. IN ALL AREAS OUTSIDE OF PAVEMENT, STRUCTURES OR THE ZONE OF INFLUENCE, THE FINAL BACKFILL SHALL BE SUITABLE ON-SITE MATERIAL APPROVED BY THE ENGINEER.
5. GEOTEXTILE FABRIC: INSTALL A GEOTEXTILE FABRIC IN ACCORDANCE WITH ODOT 712.09, TYPE A, AFTER ALL INITIAL BACKFILL CONSISTING OF AASHTO NO. 57 OR NO. 67 GRANULAR PIPE EMBEDMENT.
6. DETECTOR TAPE: IF REQUIRED IN THE SPECIFICATIONS, INSTALL DETECTABLE WARNING TAPE ABOVE UTILITIES, 12" BELOW FINISHED GRADE, EXCEPT 6 INCHES BELOW SUBGRADE UNDER PAVEMENT AND SLABS.

C:\WORK\11\11\MS-10.DWG - 3/20/17 10:58 AM - PLOT

NOTE 1: THIS DETAIL IS VALID ONLY WHEN USED AS PRESENTED HERE, WITHOUT CHANGES AND IN CONJUNCTION WITH ANY GENERAL NOTES AND/OR OTHER DETAILS WHICH MAY APPLY. ANY CHANGES TO THIS DETAIL SHALL FIRST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER.

NOTE 2: BEFORE ANY EXCAVATION, CALL THE FOLLOWING NUMBERS AT LEAST 48 HOURS IN ADVANCE: D.U.P.S. @ (800) 342-2704 AND C.G.P.U.P.S. @ (800) 826-0260.

City of Barberton
 876 West Park Avenue, Barberton, Ohio 44209
 Phone: (330) 848-8724

**STANDARD DESIGNS
 MISCELLANEOUS
 UTILITY TRENCH DETAIL**


NO.	DATE	REVISION	NO.	DATE	REVISION

DWG FILE SD-1-1.DWG			
DATE PLOTTED 8/20/17	APPROVED BY TC	ISSUE DATE 8/20/17	SCALE NONE

MS-1.0

LATERAL TERMINATION NOTE:

LATERAL SHALL TERMINATE 6" FROM THE RIGHT OF WAY LINE UNLESS SHOWN OTHERWISE ON THE DRAWINGS. TERMINATION DEPTH SHALL BE AS LOW AS POSSIBLE, BUT NOT LOWER THAN 10'. RISER PIPE SHALL BE INSTALLED AS NECESSARY TO TERMINATE LATERAL AT 10' BELOW GRADE.

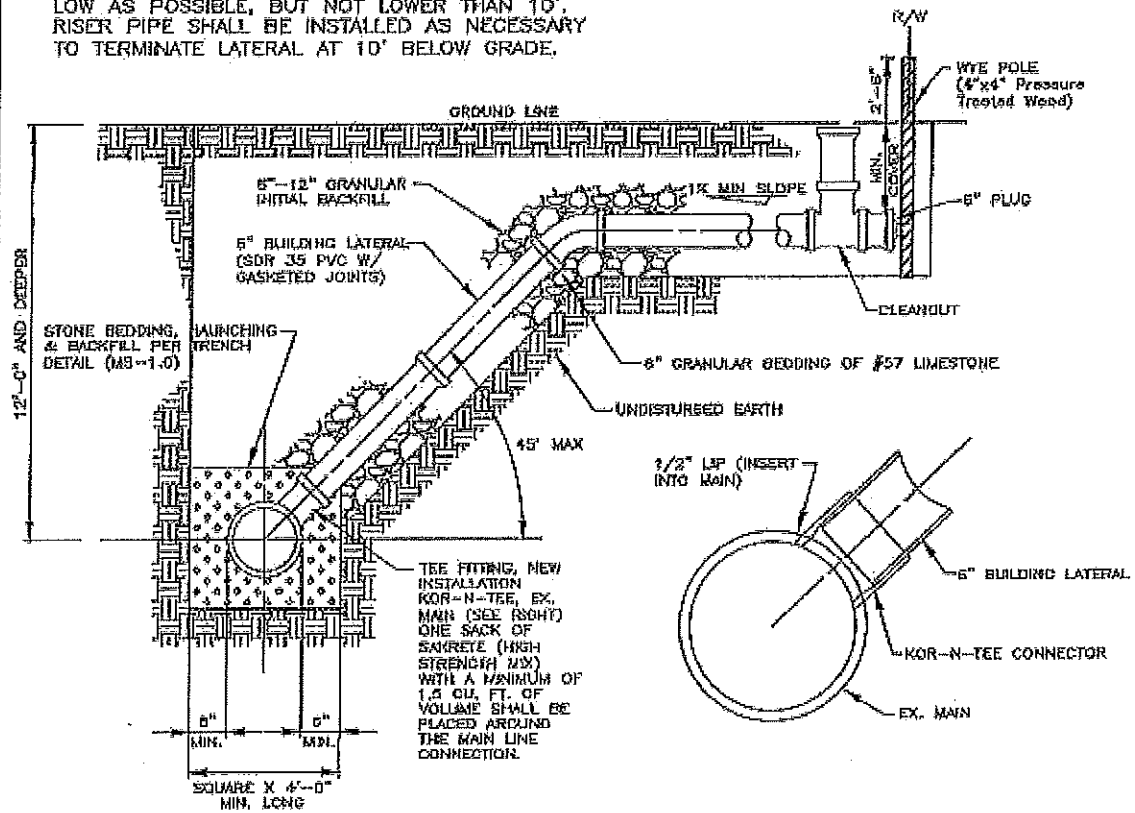

NOTES:

- HOLES IN EXISTING MAINS FOR INSTALLATION OF TEES SHALL BE CORE DRILLED USING HOLESAWS OR CORING MACHINES TO ENSURE A CLEAN, ROUND, SMOOTH HOLE.
- THE TEST TEE RISER SECTION SHALL BE INSTALLED WHEN THE CONNECTION IS EXTENDED TO THE BUILDING
- THE TEST PLUG SHALL BE YELLOW IN COLOR AND JOINED BY MEANS OF AN INTEGRAL BELL WITH AN ELASTOMERIC GASKET JOINT AND BE APPROVED BY THE ENGINEER.
- A PIECE OF FERROUS MATERIAL HAVING A VOLUME OF 1.5 CUBIC INCHES SHALL BE PLACED OVER THE TOP OF THE TEST PLUG AND BACKFILLED WITH 6" TO 12" OF TOPSOIL. ANY TEST PLUG LOCATED IN A PAVED AREA SHALL BE APPROVED BY THE CITY ENGINEER BEFORE CONSTRUCTION IS TO BEGIN.

NOTE 1: THIS DETAIL IS VALID ONLY WHEN USED AS PRESENTED HERE, WITHOUT CHANGES AND BY CONSULTATION WITH ANY GENERAL NOTES AND/OR OTHER DETAILS WHICH MAY APPLY. ANY CHANGES TO THIS DETAIL SHALL FIRST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER.

NOTE 2: DETAIL ANY EXCHANGERS CALL THE FOLLOWING NUMBERS AT LEAST 48 HOURS IN ADVANCE: C.D.P.S. @ (800) 341-2764 AND D.O.P.A.F.S. @ (800) 925-0382.

City of Barberton
 575 West Park Avenue, Barberton, Ohio 44203
 Phone: (330) 848-8724


**STANDARD DESIGNS
 SANITARY SEWER
 STANDARD LATERAL CONNECTION**

END TIE:
 SS-1-1.000
 DRAWN BY: BK APPROVED BY: IC ISSUE DATE: 3/25/17 SCALE: NONE

SS-1.0

ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED SHALL BE IN INCHES - 1/8" TOLERANCE UNLESS NOTED OTHERWISE - SEE CITY SPECIFICATIONS

DATE PLOTTED: 8/28/17 10:58:17 AM - 4/28/2017 10:58:17 AM - 4/28/2017 10:58:17 AM - 4/28/2017 10:58:17 AM

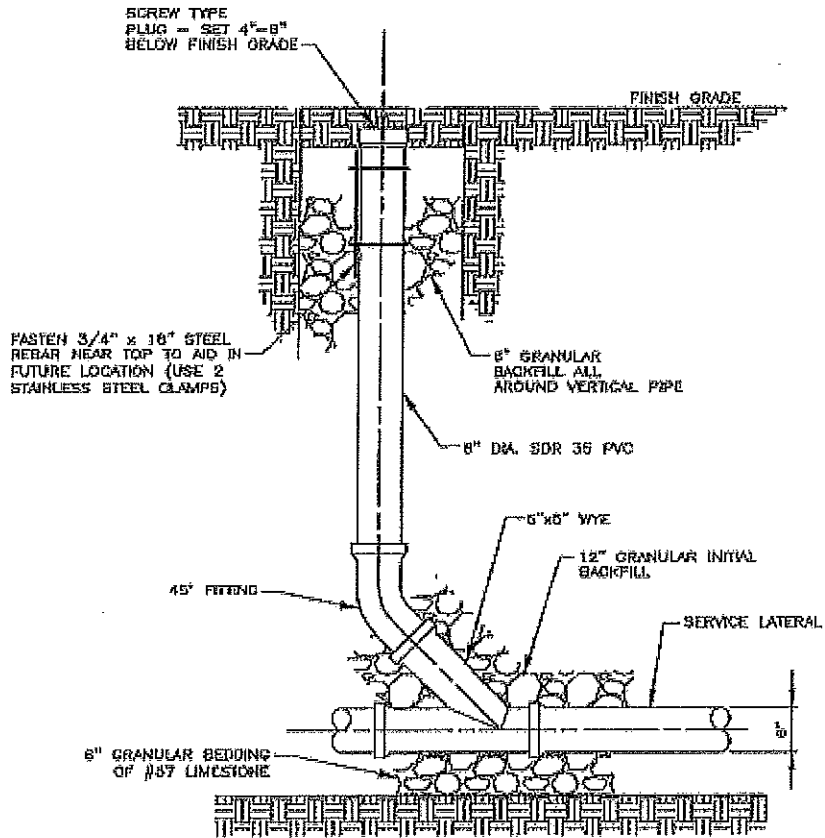

NOTE 1: THIS DETAIL IS VALID ONLY WHEN USED AS PRESENTED HERE, WITHOUT CHANGES AND IN CONNECTION WITH ANY GENERAL NOTES AND/OR OTHER DETAILS WHICH MAY APPLY. ANY CHANGES TO THIS DETAIL SHALL FIRST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER.

NOTE 2: BEFORE ANY EXCAVATING, CALL THE FOLLOWING NUMBERS AT LEAST 48 HOURS IN ADVANCE: O.U.P.S. @ (800) 362-2784 AND O.S.P.A.P.S. @ (800) 923-6989.


City of Barberton
 576 West Park Avenue, Barberton, Ohio 44208
 Phone: (930) 848-6724

**STANDARD DESIGNS
 SANITARY SEWER
 CLEANOUT DETAIL - IN GRASS**

NO.	DATE	REVISION	NO.	DATE	REVISION

GND FIG:			
SS-1-1.00%			
DRWN BY:	APP'D BY:	ISSUE DATE:	SCALE:
BR	TC	8/28/17	AS SHOWN

SS-6.0

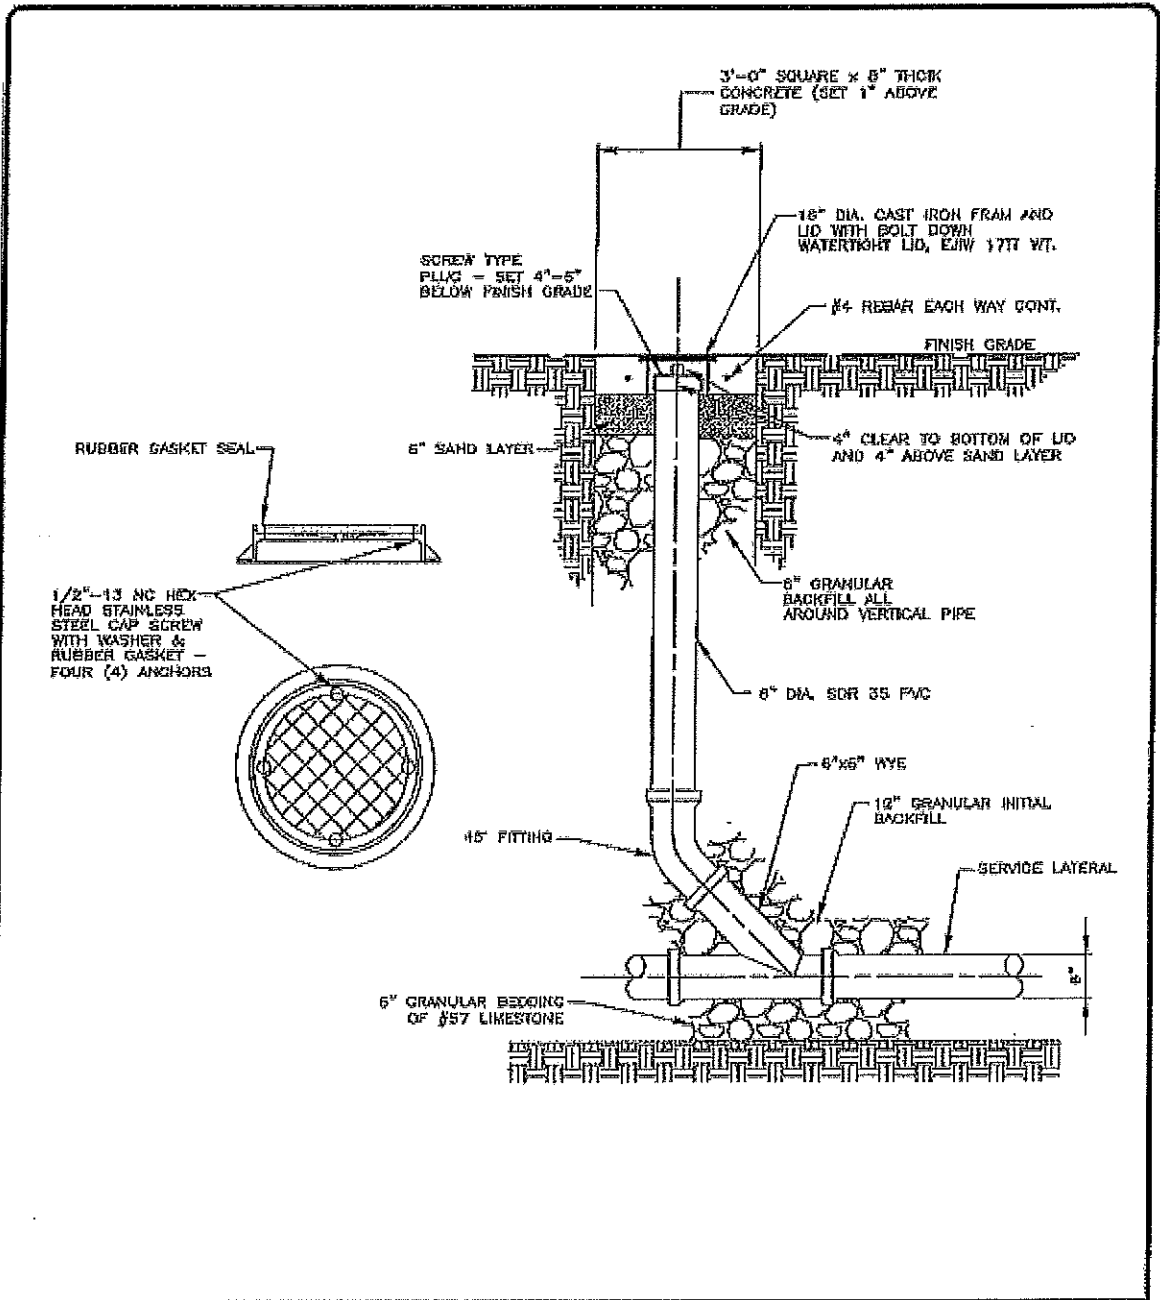

10/10/2017 10:00 AM 10/10/2017 10:00 AM - 10/10/2017 10:00 AM - 10/10/2017 10:00 AM

NOTE 1: THIS DETAIL IS VALID ONLY WHEN USED AS PRESENTED HERE WITHOUT CHANGES AND IN CONFORMANCE WITH ANY GENERAL NOTES AND/OR OTHER DETAILS WHICH MAY APPLY. ANY CHANGES TO THIS DETAIL SHALL FIRST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER.
 NOTE 2: BEFORE ANY ENGINEERING, CALL THE FOLLOWING NUMBERS AT LEAST 48 HOURS IN ADVANCE: O.U.P.S. @ (800) 362-2784 AND O.S.P.A.P.S. @ (800) 325-0498.


City of Barberton
 578 West Park Avenue, Barberton, Ohio 44203
 Phone: (330) 848-6724

NO.	DATE	REVISION	NO.	DATE	REVISION

STANDARD DESIGNS
SANITARY SEWER
CLEANOUT DETAIL - IN PAVEMENT

STD FILE: SS-1-1.085
 DRAWN BY: ER APPROVED BY: TC DATE: 8/28/17 SCALE: NONE

SS-7.0

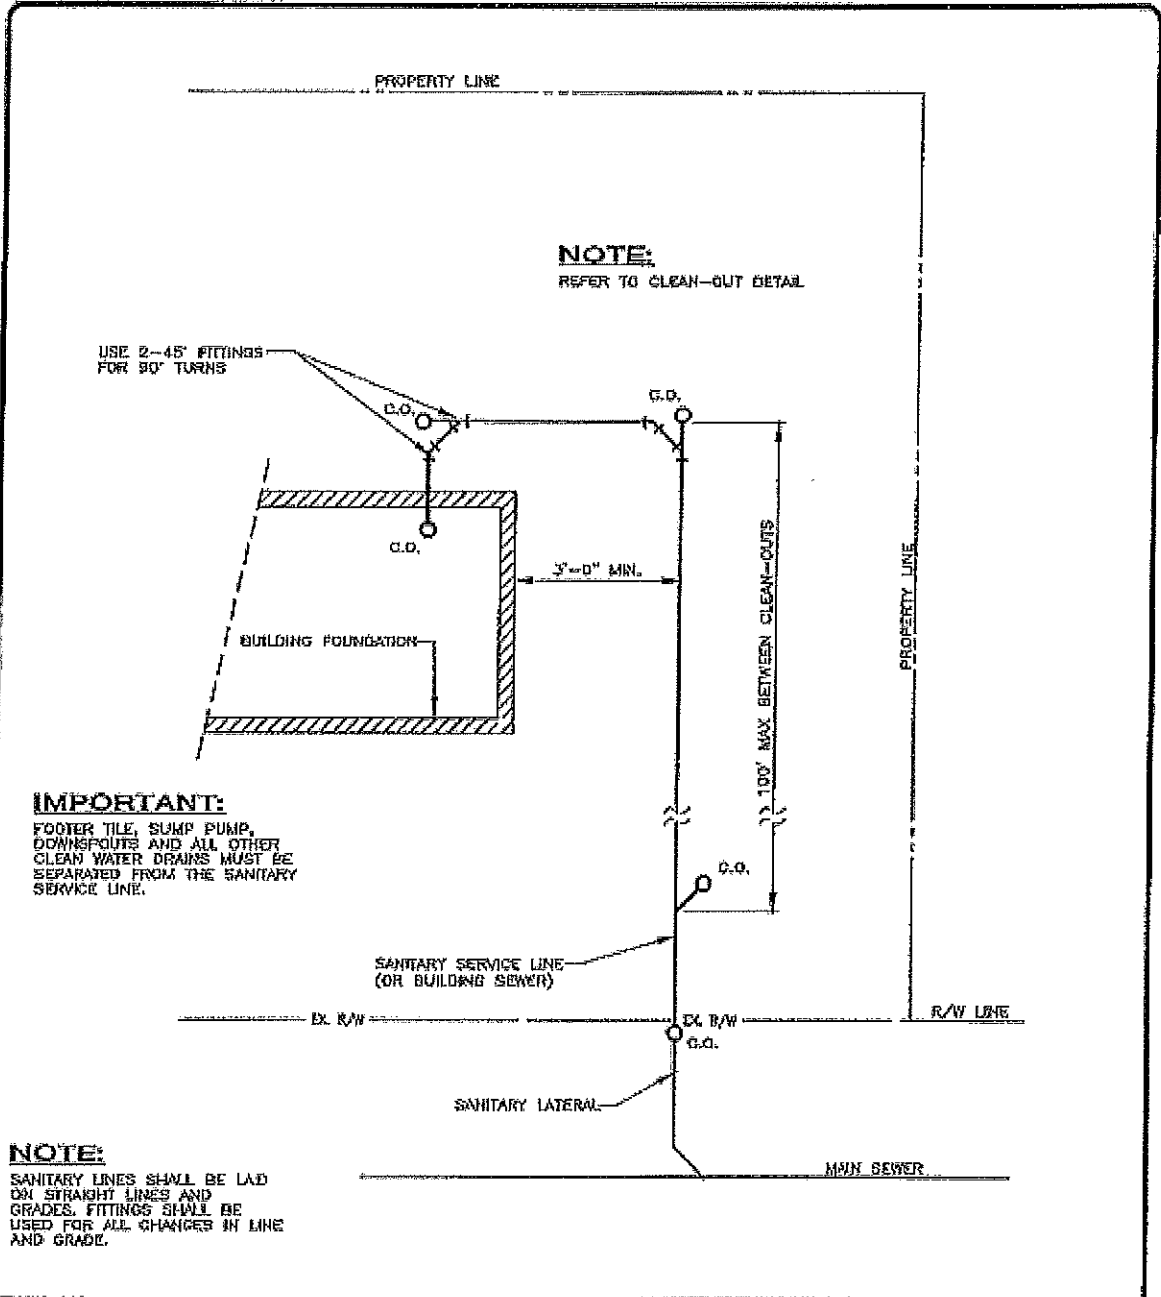

CITY OF BARBERTON, OHIO - 676 WEST PARK AVENUE, BARBERTON, OHIO 44206
 PHONE: (330) 848-6724
 FAX: (330) 848-6724
 WWW.CITYOFBARBERTON.ORG

NOTE 1: THIS DETAIL IS VALID ONLY WHEN USED AS PRESENTED HERE, WITHOUT CHANGES, AND IN CONJUNCTION WITH ANY GENERAL NOTES AND/OR OTHER DETAILS WHICH MAY APPLY. ANY CHANGES TO THIS DETAIL SHALL FIRST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER.

NOTE 2: BEFORE ANY EXCAVATION, CALL THE FOLLOWING NUMBERS AT LEAST 48 HOURS IN ADVANCE: O.C.P.S. @ (200) 352-2764 AND O.C.P.U.P.S. @ (400) 925-0938.

City of Barberton
 676 West Park Avenue, Barberton, Ohio 44206
 Phone: (330) 848-6724

NO.	DATE	REVISION	NO.	DATE	REVISION

**STANDARD DESIGNS
SANITARY SEWER
TYPICAL LATERAL PLAN**

C/D FILE SS-1-1.000		ISSUE DATE 8/25/17		SCALE NONE	
DESIGNER EK	HYDRO ENGR TC	DATE 8/25/17		SS-8.0	



APPLICATION FOR INSTALLING SEWER SERVICE

DATE: _____

NAME OF PROPERTY OWNER: _____

SERVICE ADDRESS: _____

RENTAL _____ TENANT NAME _____

PARCEL NUMBER _____ PROPERTY ID _____

MAILING ADDRESS IF DIFFERENT FROM SERVICE ADDRESS:

PHONE #1 _____ PHONE #2 _____

SCHEDULED DATE OF INSTALLATION _____

CONTRACTOR _____ PHONE # _____

Does applicant currently have water service: Yes _____ No _____

System Developmental Charge \$800.00

Inspection fee: \$30.00

A service contract must be signed for the Utilities Billing Department



Nash Heights Sewer Billing Information

Monthly Fee: \$49.39 Flat Rate Fee as of January 1, 2017

The billing cycle runs from the 10th of the month to the 10th of the next month.

Payment is due on the 10th of each month. If paid in full by the due date, there is no penalty fee.

Payments can be made by:

- 1) Mailing a check in the envelope enclosed with your statement
- 2) On-line at www.CityofBarberton.com – click on “utilities bill pay” at the bottom of the page – account number must be entered with the dashes
- 3) Call toll-free - 844-869-3176
- 4) Drop off: 104-3rd St NW, Barberton
(M-F 8 am-4:15 pm – closed 12:30-1:30 for lunch)
 - a. Drive-thru - enter off of W. Park
 - b. Walk in - enter on 3rd Street
 - c. Drop box - on 3rd Street – silver/gray square in side of building – money order or check only with account number listed – NO CASH PLEASE

Customer Service: 576 W Park Avenue (M-F 8 am-4:15 pm)
Barberton, OH

Main Line: 330-753-0328

Local Health District:

Sewage Treatment System (STS) Abandonment Permit/Report

Permit # (if applicable)

Audit Sticker (if applicable)

The permit with the original audit sticker and signatures must stay with the local health district. A copy must be given to the applicant at the time the permit is issued. The report must be completed and submitted to the local health district.

Property Information

Location Address: Township: County: Reason for abandonment:

Owner Information

Owner Name: Phone Number: Mailing Address:

Applicant Statement of Compliance

I agree the household sewage treatment system or component(s) will be abandoned in accordance with rule 3701-29-21 of the Ohio Administrative Code. The contents of the sewage treatment system or component(s) to be abandoned shall be disposed in accordance with rule 3701-29-20 of the Ohio Administrative Code. Signature of owner or authorized representative: Date:

For office use only:

Permit Issue Date (if applicable): Sanitarian Name (printed): Sanitarian Signature:

Abandonment Completion Report

Date completed:

System Contents (Note: Completed pumping report must be attached)

Registered Septage Hauler: Wastewater Disposal Site: Solid Waste Disposal Site:

Abandoned Component(s) (List all components abandoned and method of abandonment)

Component 1: Method: Component 2: Method: Component 3: Method: Component 4: Method:

Person/Registered Installer Completing Abandonment

Signature: Name (printed):

Local Health District Inspection (if applicable)

Sanitarian Signature: Sanitarian Name (printed): Date: